

QL40 SFM bi-directional spinner flowmeter


This QL series probe measures impeller rotation caused by fluid flow in the borehole. It uses a magnetically coupled pick-up which drives a low friction, high resolution encoder located inside the lower pressure housing. The encoder produces 256 pulses per shaft rotation. It has quadrature sensing electronics that instantaneously detect flow direction changes.




The QL40 SFM is a bottom sub, and can be combined with other logging tools in the QL (Quick Link) product line or operated as a stand alone tool. Weight bars with centralizers are recommended to improve log response and repeatability in large boreholes or low flow environments

Application

- Pumping Flow profiles in screened or perforated cased holes
- Identification of hydrostratigraphic units
- Confirmation of predicted transmissive zones in open hole

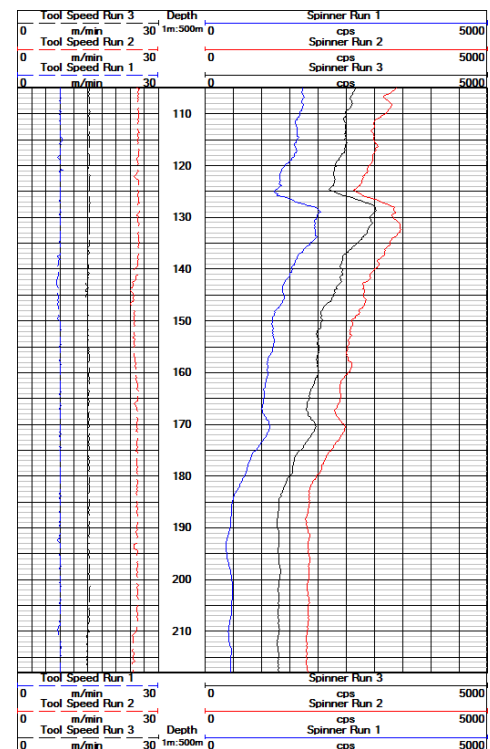

QL40.SFM bi-directional spinner flowmeter

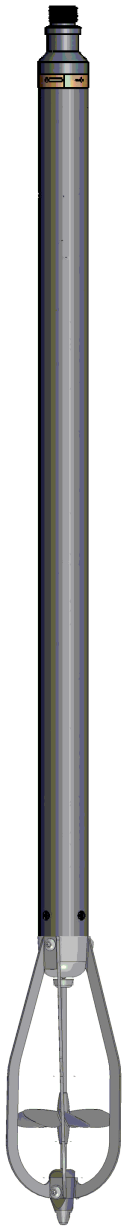

Principle of measurement

A bouyant impeller mounted on a hollow stainless steel shaft is suspended between two precision ground ceramic bearings. A balanced transfer bulkhead fitted with magnets couples motion and direction from the impeller through a sealed sensor body inside the probe. A low friction high resolution encoder detects this information and transfers it digitally to a counter circuit that sends the information by wireline modem to the surface.

Measurements / Features

The probe is supplied with two different cages to provide optimum results in a variety of borehole diameters. 60 and 75 mm diameter varied pitch impellers are available.


Technical Specifications

- Diameter: 40 mm (1.57") excluding cage
- Length: 90 cm (35.4")
- Weight: 3.2 kg (7 lbs)
- Max. temp: 70°C (158°F)
- Max. pressure: 200 bar (2900 psi)

Operating Conditions

Open or cased borehole
Water filled
Centralization recommended.

Flow rate in gpm vs. spinner speed in cps

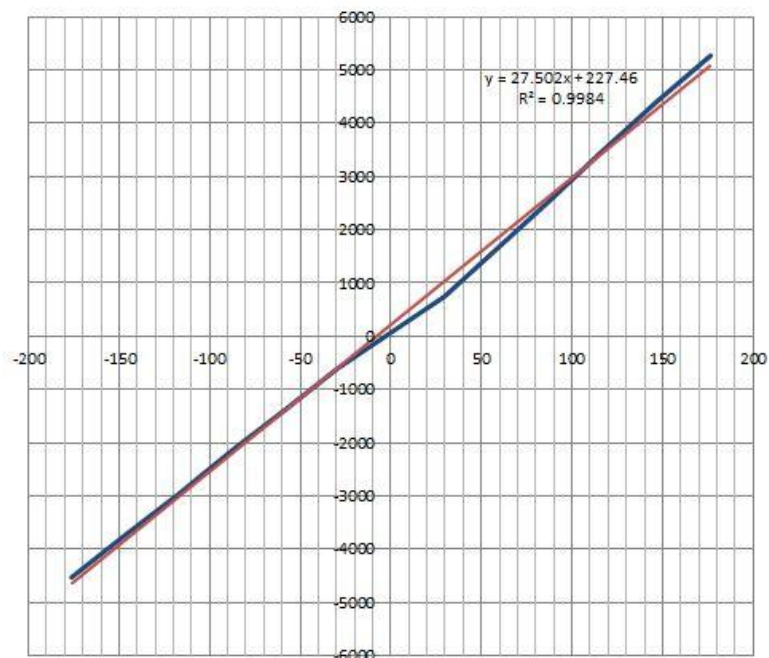

Typical flow response curve for up and down runs in 6" casing

The specifications are not contractual and are subject to modification without notice.

Mount Sopris Instrument Co. Inc. | 4975 E. 41 st Ave. Denver | CO 80216 | USA | Ph. 303 279 3211 | www.mountsopris.com



Zoning de Solupla Bât A | route de Niederpallen | L-8506 Redange | Luxembourg | Tel. +352 23 649 289 | www.alt.lu
36th Floor, Menara Maxis | Kuala Lumpur City Centre | 50088 Kuala Lumpur | Malaysia | Tel. +60 3 2615 7261 | www.alt.lu